




PULSE-Adapter [Coin] v1.02

With the PULSE-Adapter [Coin] it is possible to connect external credit devices like [Nayax credit card reader](#), [Otiglobal cashless payment systems otipulse](#), a coin chute with impulse switch, or other pulse devices, easily via plugable terminal connector to a COIN connector with NRI-G13 pinout, like it is on the CASH-Interface2 or CI MC8 board.

By a jumper it is possible to select the coin channel, on which the external credit signal is transferred to. The external cash device can be controlled via INHIBIT of the coin plug, too.

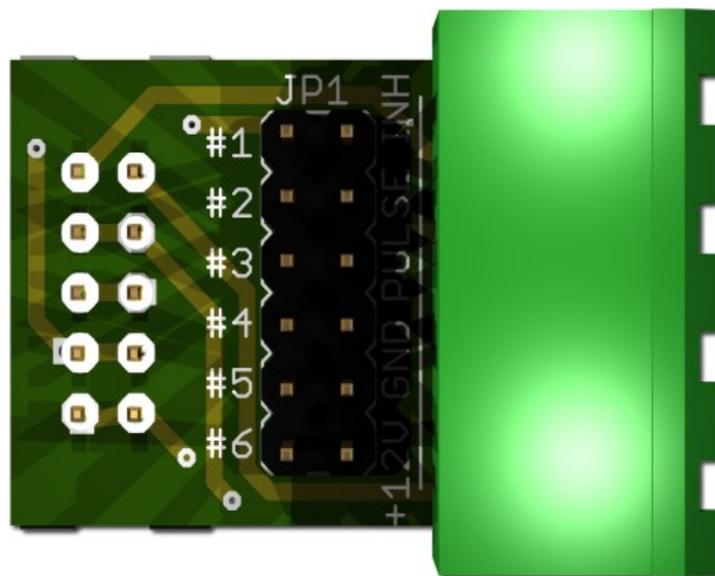


Nayax and OTI pulse connection it is just power (plus and minus) and the pulse signal.

Occupation of the 4 pole plug:

Usage:	NAYAX	OTI
1 = +12V DC	"AC/DC+" (brown)	PIN1
2 = GND	"AC/DC-" (green)	PIN3
3 = PULSE	"PULSE1" (orange)	PIN9
4 = INHIBIT		

Be sure to verify the cables color and pinout in the device manual!

CASH-Interface2 with PULSE-Adapter [Coin]:

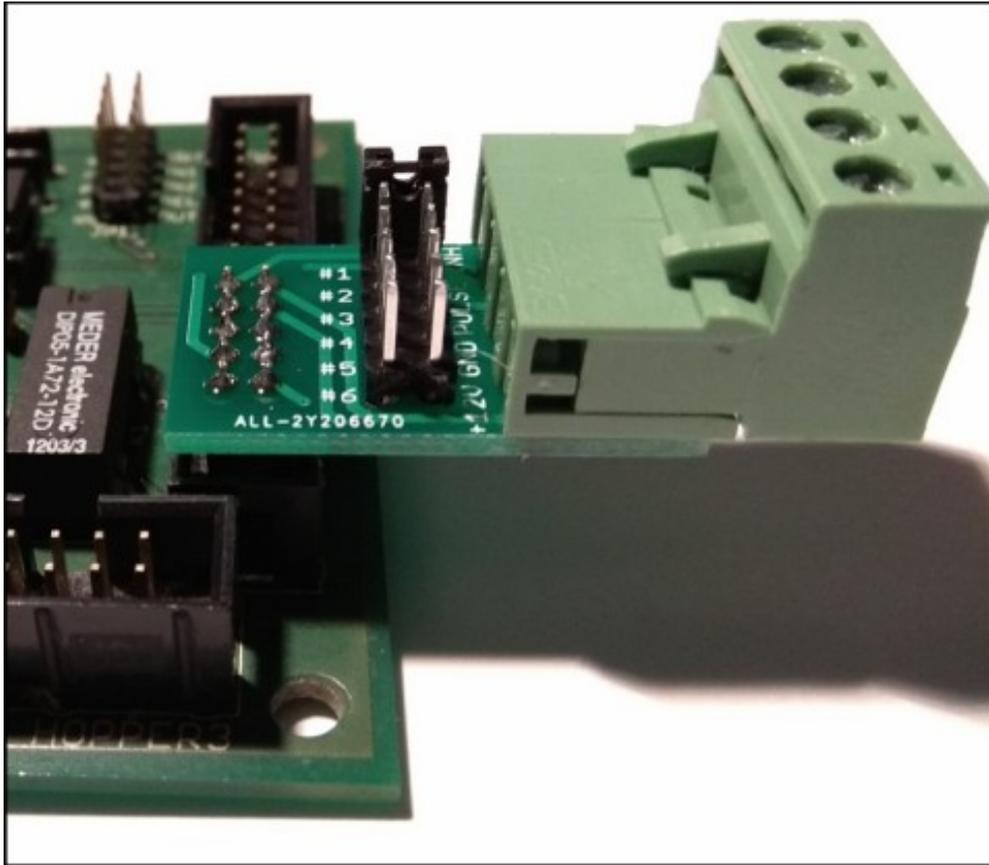

We offer several other equipment in our web shop at:
<https://www.casino-software.de/shop>

Take care when you plug in the PULSE-Adapter [Coin] it fits correctly to the COIN plug or the CASH-Interface board gets destroyed !!!